



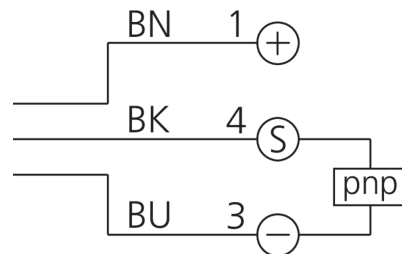

200353 **DCC 3.0 V 0.6 PSK-K-TSL** **Inductive proximity sensor**

- Highly flexible cable
- Metal connector
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

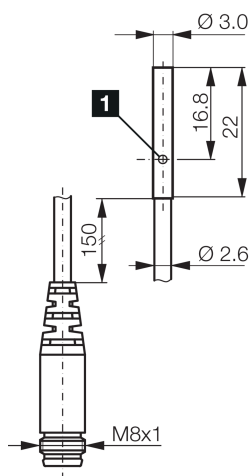

1) LED

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	10 ... 30 V DC
No-load current (max.)	10 mA
Insulation voltage endurance	500 V
Installation type	Flush
Housing material	Stainless steel
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	digital
Design	Cylinder
Product series	Miniature design
Switching output	pnp, 100 mA, NO
Voltage drop (max.)	2,0 V
Switching distance (SN)	0,6 mm
Standardized measuring plate	3 x 3 x 1 mm
Switching hysteresis (max.)	5 %
Switching frequency	5.000 Hz
Ambient temperature during operation	-25 ... +70 °C
Protection type	IP 67
Connection	Connector, M8, 3-pin
Connection cable	TK ...



200353
DCC 3.0 V 0.6 PSK-K-TSL
Inductive proximity sensor

[More information / accessories](#)

<https://www.di-soric.com/200353>