




201715
TKHM-W-5
Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

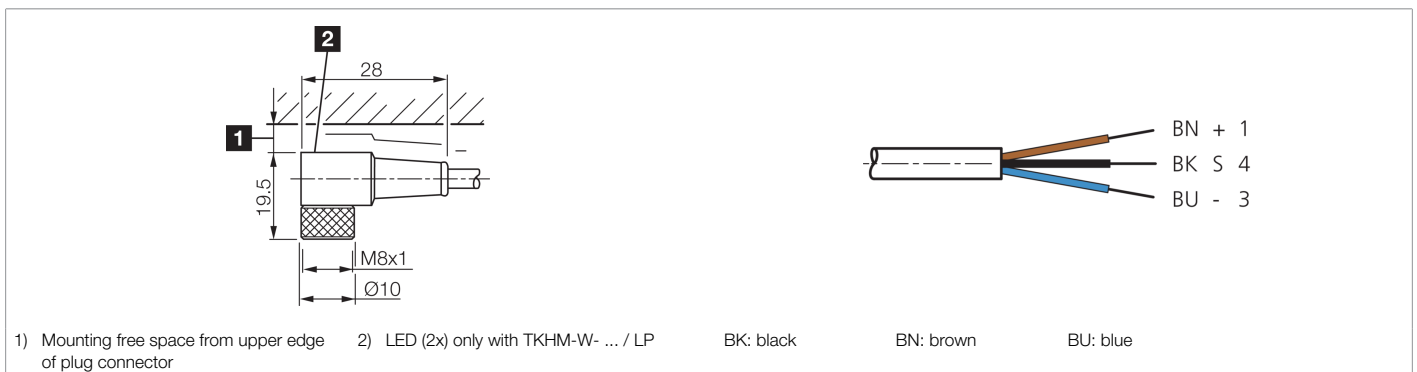

Function												

Technical data (typ.)		+20°C, 24 V DC
Service voltage		< 60 V AC/DC
Length		5.000 mm
Diameter		Ø 4,5 mm (Diameter)
Thread		M8 x 1
Material		<ul style="list-style-type: none"> ■ Polyurethane (Cable) ■ Polyurethane (Connector)
Drag chain properties		<ul style="list-style-type: none"> ■ > 2 Mio. (Bending cycles) ■ 70 mm (Min. bending radius)
Protection class		III, operation on protective low voltage
Design		Angled / open cable end
Characteristics		Metal nut
Drag chain compatible		Yes
LED Anzeige		no
Ambient temperature during operation		-5 ... +80 °C (Movable, Fixed)
Protection type		IP 67 (at tightening torque 0.4 Nm)
Connection		Socket, M8, 3-pin
Cross-section		0,25 x 0,25 mm (3 x)

More information / accessories		https://www.di-soric.com/201715
--------------------------------	--	---