



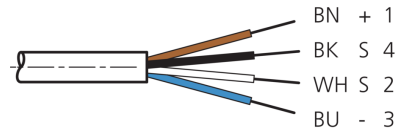

201716
TKHM-W-5/4
Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts



1) Mounting free space from upper edge of plug connector 2) LED (2x) only with TKHM-W- ... / LP BK: black BN: brown BU: blue WH: white

Function												
												

Technical data (typ.)		+20°C, 24 V DC	
Service voltage		< 60 V AC/DC	
Length		5.000 mm	
Diameter		Ø 4,8 mm (Diameter)	
Thread		M8 x 1	
Material		<ul style="list-style-type: none"> ■ Polyurethane (Cable) ■ Polyurethane (Connector) 	
Drag chain properties		<ul style="list-style-type: none"> ■ > 2 Mio. (Bending cycles) ■ 70 mm (Min. bending radius) 	
Protection class		III, operation on protective low voltage	
Design		Angled / open cable end	
Characteristics		Metal nut	
Drag chain compatible		Yes	
LED Anzeige		no	
Ambient temperature during operation		-5 ... +80 °C (Movable, Fixed)	
Protection type		IP 67 (at tightening torque 0.4 Nm)	
Connection		Socket, M8, 4-pin	
Cross-section		0,25 x 0,25 mm (4 x)	

More information / accessories <https://www.di-soric.com/201716>