




201726
TKHM-Z-5
Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

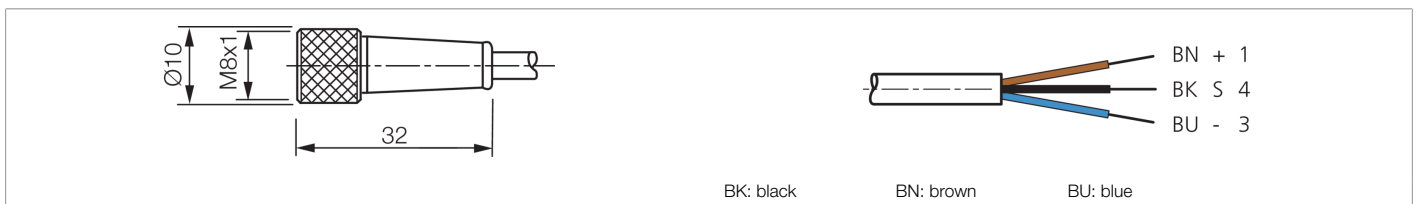

Function													
													

Technical data (typ.)		+20°C, 24 V DC	
Service voltage		< 60 V AC/DC	
Length		5.000 mm	
Diameter		Ø 4,5 mm (Diameter)	
Thread		M8 x 1	
Material		<ul style="list-style-type: none"> ■ Polyurethane (Cable) ■ Polyurethane (Connector) 	
Drag chain properties		<ul style="list-style-type: none"> ■ > 2 Mio. (Bending cycles) ■ 70 mm (Min. bending radius) 	
Protection class		III, operation on protective low voltage	
Design		Straight / open cable end	
Characteristics		Metal nut	
Drag chain compatible		Yes	
LED Anzeige		no	
Ambient temperature during operation		-5 ... +80 °C (Movable, Fixed)	
Protection type		IP 67 (at tightening torque 0.4 Nm)	
Connection		Socket, M8, 3-pin	
Cross-section		0,25 x 0,25 mm (3 x)	
More information / accessories		https://www.di-soric.com/201726	