





202924
DCC 08 M 04/10 AK-TSL
Inductive proximity sensor

- Analog voltage output
- Metal connector
- Integrated amplifier
- Short-circuit protection

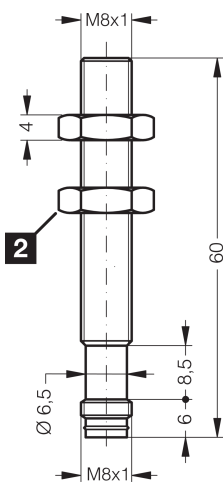

1) Width over flats mm

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	15 ... 30 V DC
No-load current (max.)	10 mA
Insulation voltage endurance	500 V
Installation type	quasi-flush
Thread	M8 x 1
Housing material	Brass (CuZn, nickel-plated)
Tightening torque (max.)	4 Nm
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	analog
Design	Thread
Characteristics	extremely high operating distance
Product series	analog
Analog output	0 ... 10 V
Switching distance (SN)	0 ... 4 mm
Standardized measuring plate	12 x 12 x 1 mm
Switching hysteresis (max.)	10 %
Switching frequency	1.600 Hz
Ambient temperature during operation	-25 ... +70 °C
Protection type	IP 67



202924

DCC 08 M 04/10 AK-TSL

Inductive proximity sensor

Technical data (typ.)

+20°C, 24 V DC

Connection

Connector, M8, 3-pin

Connection cable

TK ...

More information / accessories

<https://www.di-soric.com/202924>