



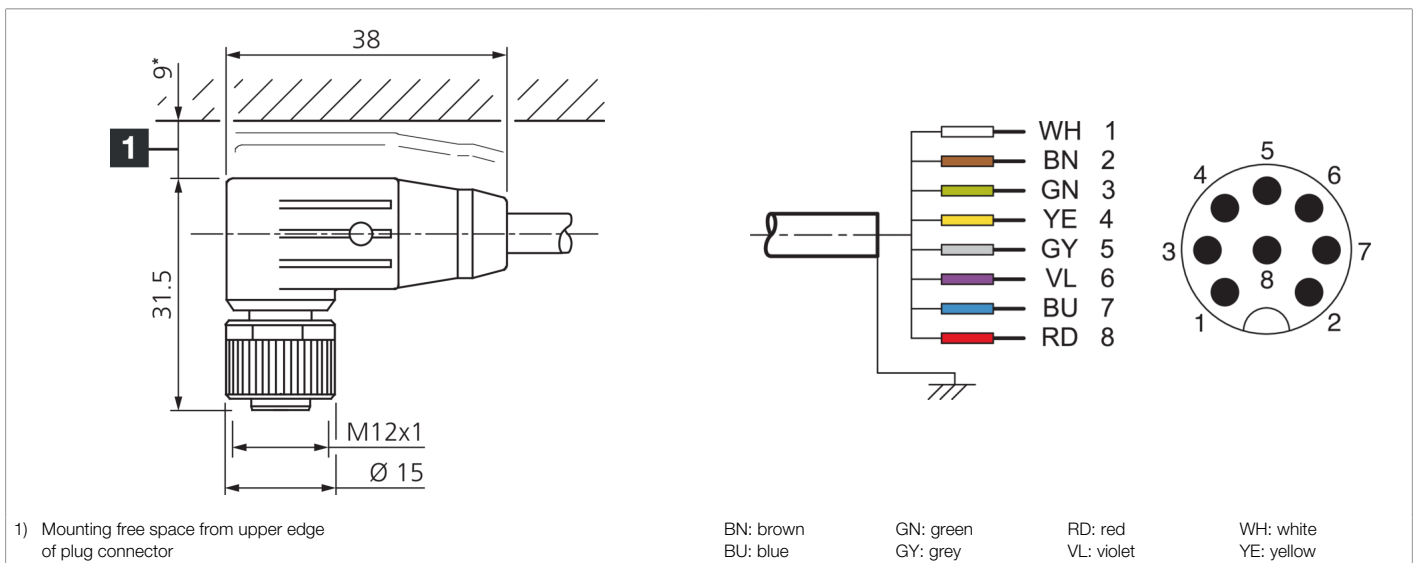


**203681**  
**VKHM-W-5/8**  
**Connection cable**

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts



Function											
											

Technical data (typ.)		+20°C, 24 V DC
Service voltage		< 30 V AC/DC
Length		5.000 mm
Diameter		Ø 6,0 mm (Diameter)
Thread		M12
Material		<ul style="list-style-type: none"> <li>■ Polyurethane (Cable)</li> <li>■ Polyurethane (Connector)</li> </ul>
Drag chain properties		<ul style="list-style-type: none"> <li>■ &gt; 2 Mio. (Bending cycles)</li> <li>■ 90 mm (Min. bending radius)</li> </ul>
Protection class		III, operation on protective low voltage
Design		Angled / open cable end
Characteristics		Metal nut
Drag chain compatible		Yes
LED Anzeige		no
Ambient temperature during operation		-20 ... +80 °C (Movable, Fixed)
Protection type		IP 67 (at tightening torque 0.6 Nm)
Connection		Socket, M12, 8-pin
Cross-section		0,25 x 0,25 mm (8 x)

More information / accessories	
	<a href="https://www.di-soric.com/203681">https://www.di-soric.com/203681</a>