



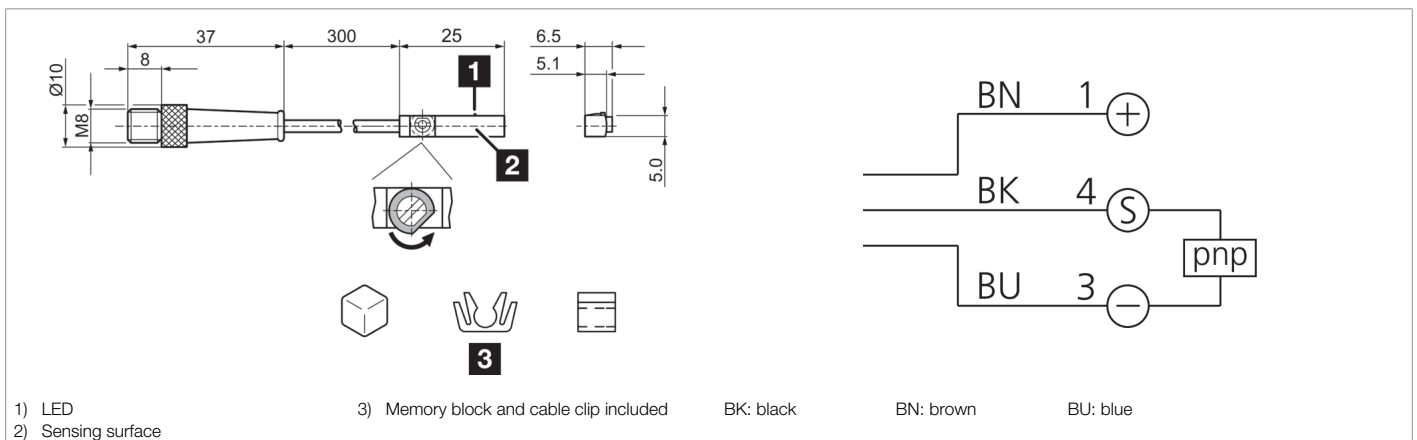

**204654**  
**MZET 9-25 PSL-K-TSS**  
**Cylinder sensor**

- To be inserted from above
- Compact design
- Completely electronic, vibration-resistant
- High reproducibility

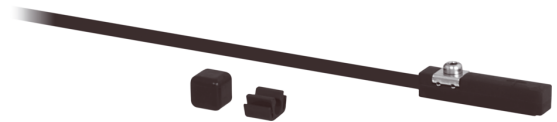

Function												

Technical data (typ.)	+20°C, 24 V DC
Current-carrying capacity	100 mA, short-circuit-proof, polarity-safe
Service voltage	10 ... 30 V DC
No-load current (max.)	10 mA
Insulation voltage endurance	500 V
Cylinder groove	T-groove, Can be inserted into the groove from above
Mounting	Excentric
Housing material	Plastic (PA)
Material	<ul style="list-style-type: none"> <li>■ Stainless steel (Fastening excentric)</li> <li>■ Stainless steel (Fastening excentric)</li> <li>■ Polyurethane (Cable)</li> </ul>
Protection class	III, operation on protective low voltage
Switching output	pnp, NO, short-circuit-proof
Voltage drop (max.)	2,5 V
Reproducibility	0,2 mm
Display	LED yellow - Output signal
Switching frequency	10.000 Hz
Ambient temperature during operation	-25 ... +80 °C
Protection type	IP 67
Connection	Cable/connector, 0,3 m, M8

More information / accessories	<a href="https://www.di-soric.com/204654">https://www.di-soric.com/204654</a>
--------------------------------	---