




209940
KLT-M3-T2-0.5
Plastic fiber optics

- Accurate detection
- Optional attachment optics
- Cutting knife included

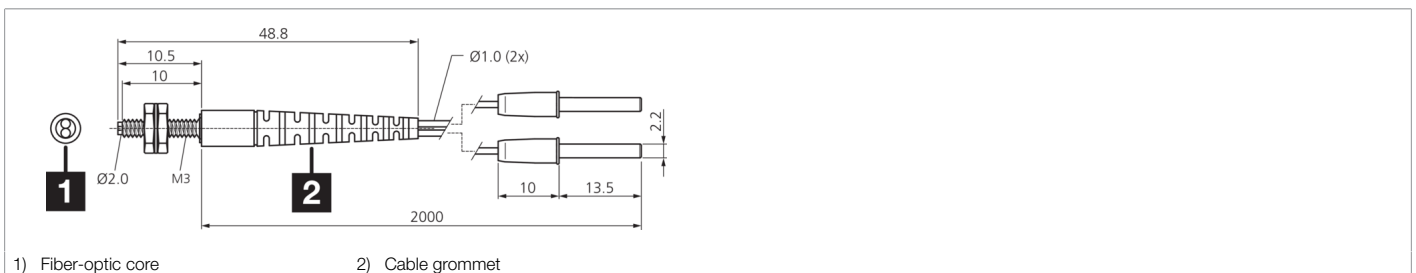

Function



Technical data (typ.)	+20°C, 24 V DC
Length	2.000 mm (Can be shortened)
Thread	M3
Light aperture	axial
Bending radius	> 15 mm
Fiber	Parallel, Ø 0,5 mm (2x)
Material	<ul style="list-style-type: none"> ■ Stainless steel (Sensor probe) ■ PE (Coating)
Operating principle	Diffuse sensor
Design	Thread
Characteristics	With cable protection bushing
to be used for	Device series OLV-K Amplifier
Range	75 mm
Resolution	Ø 0,05 mm
Temperature resistance	-55 ... +70 °C

More information / accessories <https://www.di-soric.com/209940>