




201446
OLV 40 P3K-IBS
Glass fiber-optic amplifier

- Metal casing
- Infrared light
- Sensitivity is adjustable
- High switching frequency
- Light/dark switching
- Time module optionally available

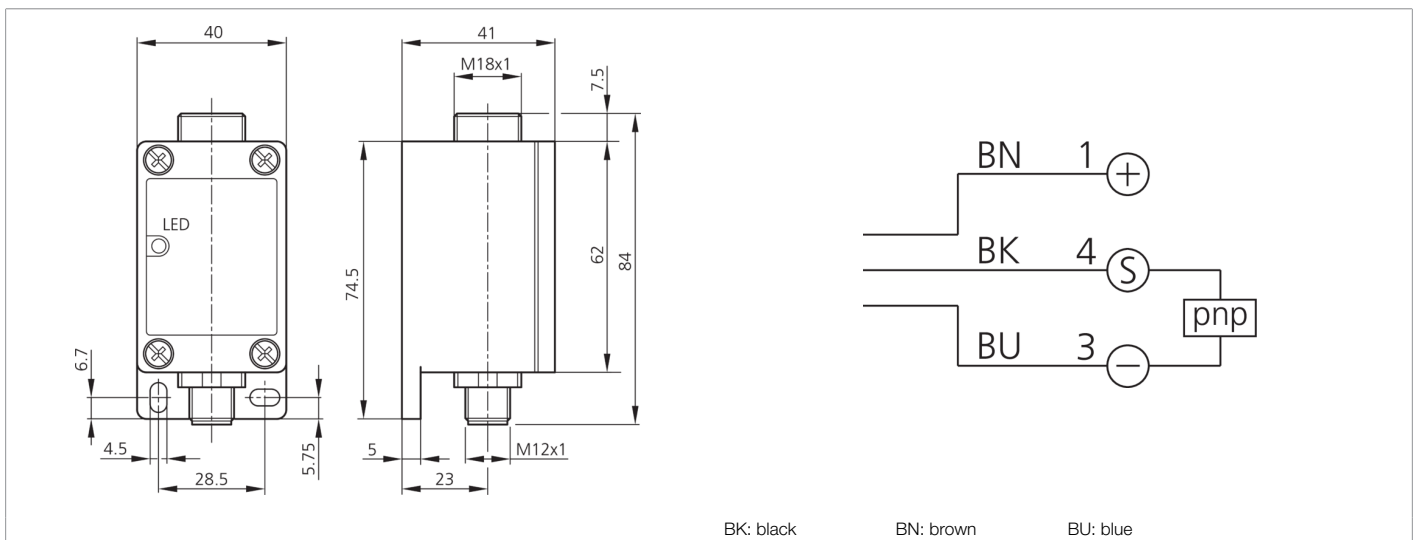

Function										
										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	12 ... 35 V DC
No-load current (max.)	55 mA
Insulation voltage endurance	500 V
Housing material	Die-cast zinc (painted)
Protection class	III, operation on protective low voltage
Amplifier for	Glass fiber optics M18
Evaluation	digital
Switching output	pnp, 200 mA, NO/NC, programmable
Light source	LED
Color	Infrared
Wavelength	880 nm
Modulation	Clocked
Ambient light immunity	20 kLx
Range	Dependent on fiber-optic cable
Switching hysteresis (max.)	10 %
Reproducibility	< 2 %
Sensitivity adjustment	Potentiometer
Switching frequency	1.500 Hz
Activation time	0,33 ms
Release time	0,33 ms



201446
OLV 40 P3K-IBS
Glass fiber-optic amplifier

Technical data (typ.)	+20°C, 24 V DC
Ambient temperature during operation	-10 ... +60 °C
Temperature drift	0,3 %/K
Protection type	IP 65
Connection	Connector, M12, 3-pin
More information / accessories	https://www.di-soric.com/201446