




202857
TKHM-Z/TSM-Z/T
Function adapters

- Suitable for all standard sensors
- Compact design
- Can be retrofitted quickly and easily
- High temperature use range
- LED display for status and switching output

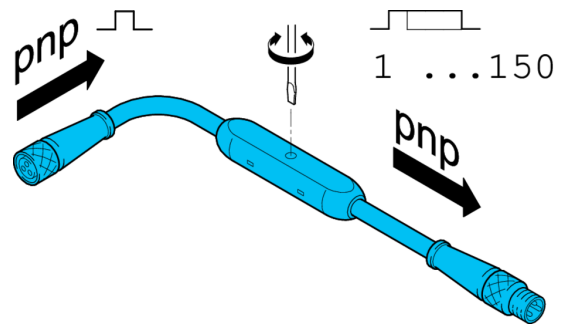

1) Potentiometer (only ...TSM-Z/T)
 2) LED STATUS
 3) LED SWITCHING OUTPUT

4 BK
 BU 3
 1 BN
 Kupplung
 Coupling
 M8

4 BK
 BN 1
 3 BU
 Stecker
 Connector
 M8

BK: black BN: brown BU: blue

Function										

Technical data (typ.)	+20°C, 24 V DC
Current-carrying capacity	200 mA, short-circuit-proof
Service voltage	10 ... 35 V DC
No-load current (max.)	20 mA
Thread	M8 x 1
Housing material	Plastic
Protection class	III, operation on protective low voltage
Operating principle	pnp pulse stretcher
Characteristics	Metal nut
Application	Digital signal
Function selection	pnp
Switching output	pnp (1 ... 150 ms)
Switching frequency	500 Hz
Ambient temperature during operation	-20 ... +70 °C
Protection type	IP 67
Connection	Cable/socket, M8, 3-pin
Connection 2	Cable/connector, M8, 3-pin

More information / accessories <https://www.di-soric.com/202857>