
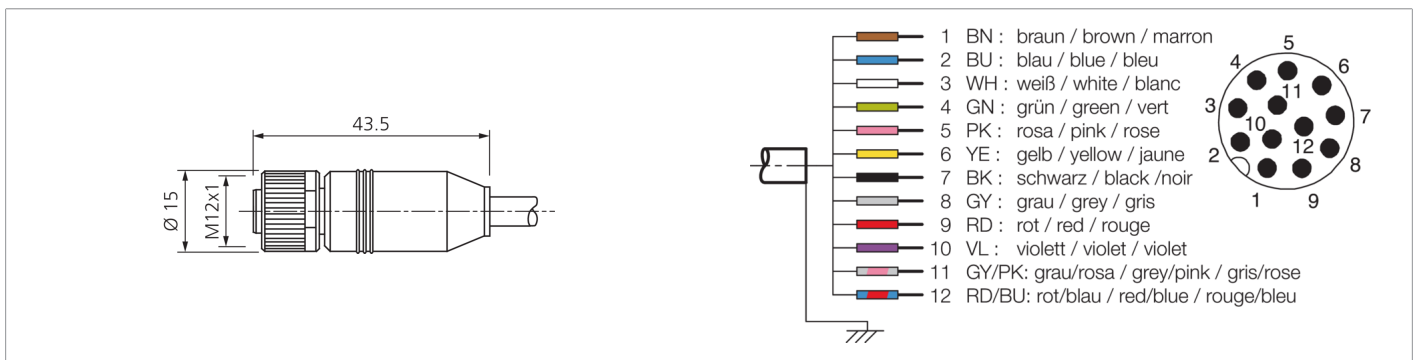


**206911**  
**VKSM-Z-5/12-A**  
**I/O cable**

- Shielded
- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

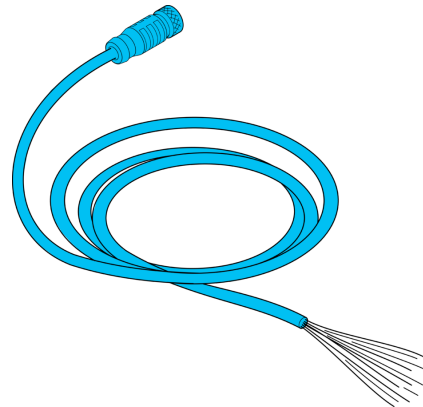

Function												

Technical data (typ.)	+20°C, 24 V DC
Service voltage	< 30 V AC/DC
Length	5.000 mm
Diameter	$\varnothing 6,5$ mm (Diameter)
Thread	M12
Material	<ul style="list-style-type: none"> <li>■ Polyurethane (Cable)</li> <li>■ Polyurethane (Connector)</li> </ul>
Drag chain properties	<ul style="list-style-type: none"> <li>■ &gt; 5 Mio. (Bending cycles)</li> <li>■ 65 mm (Min. bending radius)</li> </ul>
Protection class	III, operation on protective low voltage
Design	Straight / open cable end
Characteristics	Shielded, Metal nut
Drag chain compatible	Yes
LED Anzeige	No
Ambient temperature during operation	-25 ... +80 °C (Movable, Fixed)
Protection type	IP 67 (at tightening torque 0.6 Nm)
Connection	Socket, M12, 12-pin
Connection 2	flying leads
Cross-section	0,14 x 0,14 mm (12 x)

**More information / accessories** <https://www.di-soric.com/206911>