



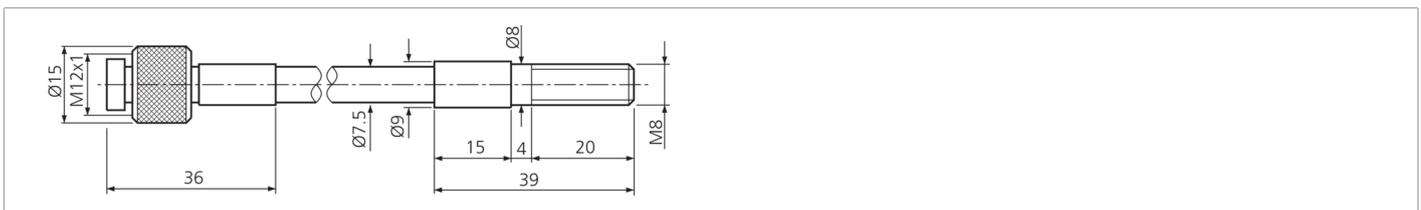

**210229**  
**WRBP 1000 M-M8-4.0**  
**Glass fiber optics**

- Thread M12x1, for screwing on to transmitter and receiver.  
For hard-to-reach places and high temperature ranges.
- High-quality glass fibers
- Resistant to high temperatures
- Robust, highly flexible

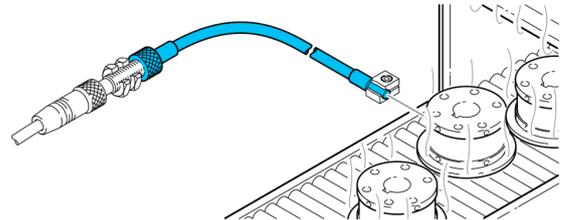

<b>Technical data (typ.)</b>	<b>+20°C</b>
<b>Mechanical features</b>	
Length	1,000 mm (Fiber optics)
Dimension fiber bundle	Ø 4.0 mm
Bending radius	> 3 x tube-Ø
Material of fiber	Glass fibers
Material	<ul style="list-style-type: none"> <li>■ Stainless steel (Sensor probe)</li> <li>■ metal sleeve (Coating)</li> </ul>
<b>General features</b>	
Component	Glass fiber optics
Operating principle	Through-beam sensor
Single fiber	Ø 0.05 mm
To be used for	Device series OP-M12
<b>Ambient conditions</b>	
Temperature resistance	-40 ... +180 °C
Protection type	IP 67
<b>More information / accessories</b>	<a href="https://www.di-soric.com/210229">https://www.di-soric.com/210229</a>