



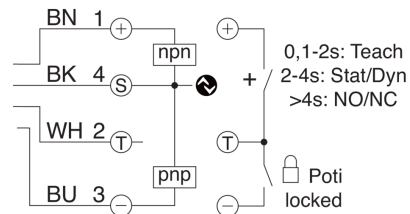

213789 IRSD-15P-G3-B4 Inductive ring sensor

- High resolution
- Short response time
- Sensitivity and pulse stretching adjustable
- Resistant to dirt
- Switchable between static and dynamic operating principle
- Metal connector
- High protection type
- Frequency switchable for reducing the installation distance
- Intelligent teach-in process
- Local and Remote can be set

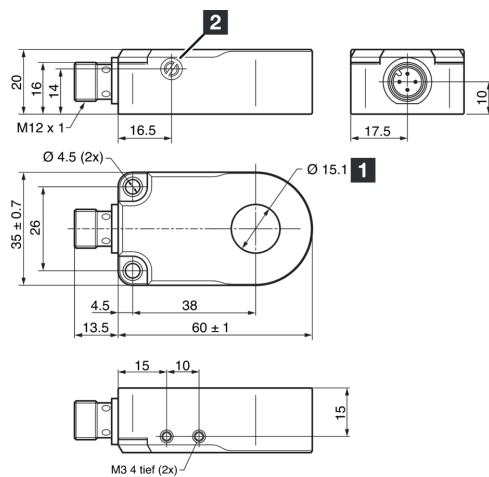

1) Ring diameter

2) sensitivity

BK: black

BN: brown

BU: blue

WH: white

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage	10 ... 30 V DC
No-load current (max.)	30 mA
Insulation voltage endurance	500 V

Mechanical features

Internal diameter	15.1 mm
Housing material	Plastic (PA)
Material	POM (Ring)

Certifications, approvals

Protection class	III, operation on protective low voltage
Approvals	UL

General features

Operating principle	Dynamic/static switchable
---------------------	---------------------------

Output, input, interface

Switching output	Push-pull/PNP/NPN, 100 mA, NO/NC, switchable
Voltage drop (max.)	2 V
Interface	IO-Link
Pulse stretching	adjustable


213789
IRSD-15P-G3-B4
Inductive ring sensor
Technical data (typ.)
+20°C, 24 V DC
Detection range, measuring range, tolerance limits

Resolution steel ball (high functional reliability)

1.2 mm (dynamic), 2.5 mm (static)

Resolution steel ball (smallest object size)

0.8 mm (dynamic), 2 mm (static)

Display, operation

Sensitivity adjustment

IO-Link, Potentiometer

Time behavior

Speed of parts (max.)

35 m/s

Speed of parts (min.)

0.1 m/s (dynamic)

Readiness delay (max.)

300 ms

Ambient conditions

Shock/vibration load

30 g, 11 ms / 10 ... 55 Hz, 1.0 mm

Ambient temperature during operation

-25 ... +70 °C

Permissible relative humidity

< 95% (+25°C) / < 90% (+40°C), non-condensing (increased humidity affects the sensor nominal resolution)

Protection type

IP 67

Electrical connection

Connection

Connector, M12, 4-pin, A-coded

Accessories

Connection cable

VK ...

More information / accessories
<https://www.di-soric.com/213789>