





**210596**  
**US 30 M 6000 IU-B4**  
**Ultrasonic sensor**

- IO-Link
- Configurable as an ultrasonic sensor or barrier
- Analog current output
- 3 different teach modes
- Resistant to dirt
- Metal casing
- Plug connector M12
- Protection class IP 67

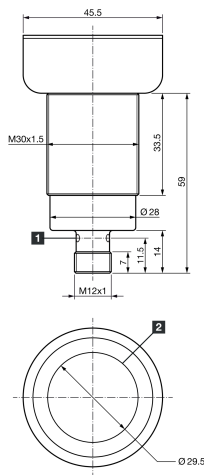

1) LED 2 x 2

2) Sound outlet ultrasonic transducer

BK: black

BN: brown

BU: blue

WH: white

**Function**

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Technical data (typ.)	+20°C, 24 V DC
Service voltage	18 ... 30 V DC
No-load current (max.)	45 mA (24 V DC)
Inverse polarity protection	yes, except for the analog output PIN2
Short-circuit protection	Yes
Insulation voltage endurance	500 V
Housing dimensions	M30 x 78 mm
Thread	M30 x 1,5
Transmission exit	axial
Assembly distance (sensor to sensor)	1.400 mm
Transmission angle of the object	10°
Housing material	Brass (CuZn, nickel-plated)
Material	Epoxy resin, PUR (Transducer surface)
Protection class	III, operation on protective low voltage
Operating principle	Ultrasonic sensor, Ultrasonic barrier
Evaluation	digital, analog
Design	Thread
Characteristics	IO-Link
Operation modes	STANDARD, Master / slave function (synchronization or multiplex operation)
Scope of delivery	Sensor, 2 x M30 nuts



**210596**  
**US 30 M 6000 IU-B4**  
**Ultrasonic sensor**

Technical data (typ.)	+20°C, 24 V DC
Functions	Analog 0...10V / 4...20mA / 0... 20mA, Teach, switching output push-pull, PNP, NPN (Pin 2), Teach , push-pull, PNP, NPN, synchronization, multiplex (PIN 4)
Switching output	Push-pull, 100 mA, NO/NC, switchable
Max. switch current	100 mA
Voltage drop (max.)	2,0 V
Analog output	0 ... 10 V, 4 ... 20 mA ((0 ... 20 mA IO-Link))
Interface	IO-Link (V1.1, COM2 38.4 kBd, Smart Sensor Profile)
Load resistance	> 10 K $\Omega$ (0 ... 10 V) / < 400 $\Omega$ (4 ... 20 mA / 0 ... 20 mA)
Nominal switching distance (Sn)	6.000 mm
Range	600 ... 6.000 mm
Adjustment range	600 ... 6.000 mm (Teach in)
Resolution	$\varnothing$ 1,0 mm (Adjusted measuring range/4095 (analog output))
Standardized measuring plate	200 x 200 mm
Switching hysteresis (max.)	5 ... 50 mm (Adjustable by IO-Link)
Reproducibility	4.0 mm
Linearity error	$\pm$ 0,5 %
Sensitivity adjustment	Remote teach
Display	LED 1x Green - Status, 1x yellow - Switching output
Measuring frequency	17 Hz
Switching frequency	80 kHz
Switching frequency	2,0 Hz
Readiness delay (max.)	300 ms
Shock/vibration load	30 g, 11 ms / 10 ... 55 Hz, 1,0 mm
Ambient temperature during operation	-25 ... +70 °C
Temperature drift	0,2 %/K (uncompensated)
Temperature drift	< 1,5 %/Sn (compensated)
Protection type	IP 67
Connection	Connector, M12, 4-pin
Connection cable	VKHM ... /4
<b>More information / accessories</b>	<b><a href="https://www.di-soric.com/210596">https://www.di-soric.com/210596</a></b>